

INVERSION PARAMETERS

2D inversion code: Geotech Zvert2D-beta

Model Mesh: 440 wide x 62 vertical,

22.79m cell width,

2 cells between sites

Input Data: 5 frequencies (30-360Hz),

In-Phase & Quadrature,

Z/X In-line (only)

Sampling: Data sampled to every 3 points


(2304 total number of points)

Input error: 3.3% to In-Phase & Quadrature




(1-times error to 30Hz data)

Output error: 95% RMS in 4 iterations



Half-space resistivity: 30 ohm-m



Line 2140

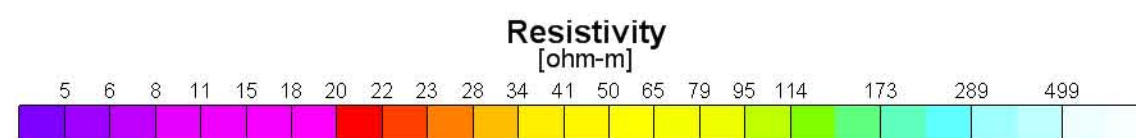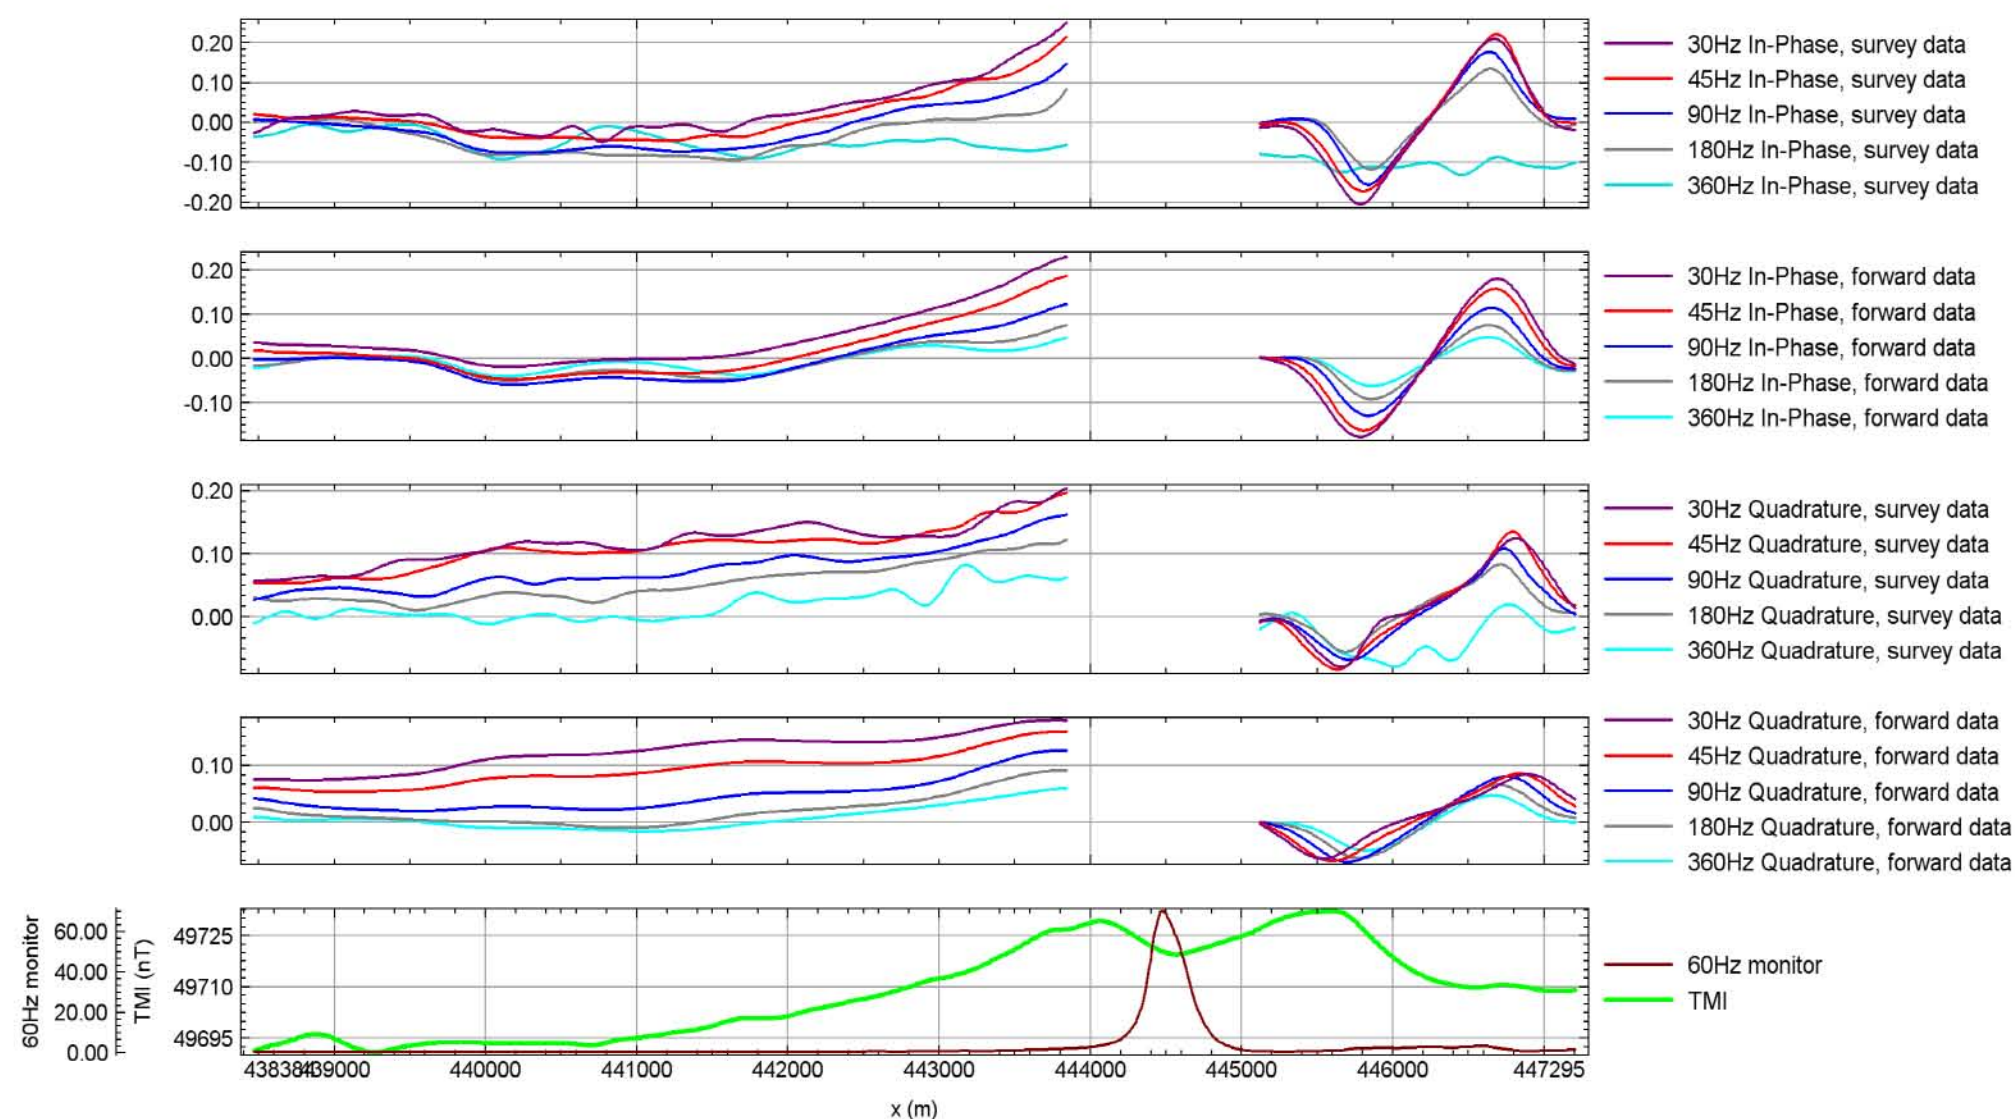

Flight Path of Line L2140
over 45Hz In-Phase Total Divergence image

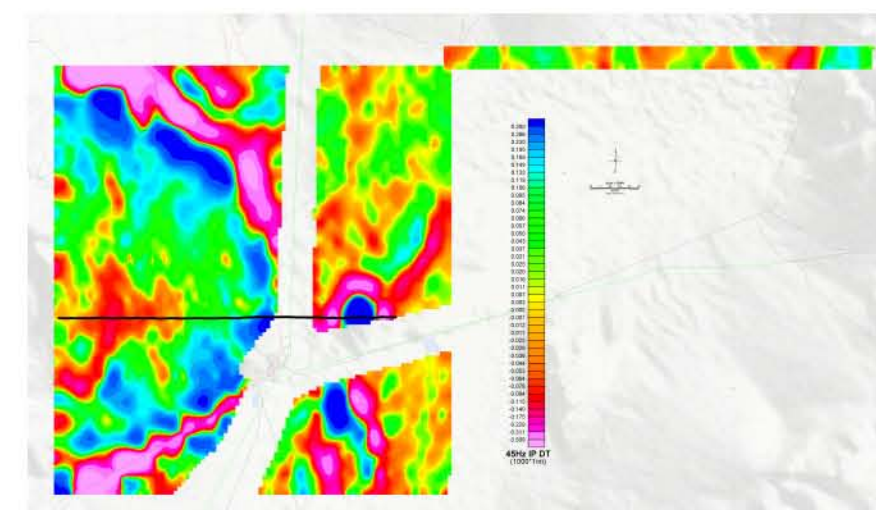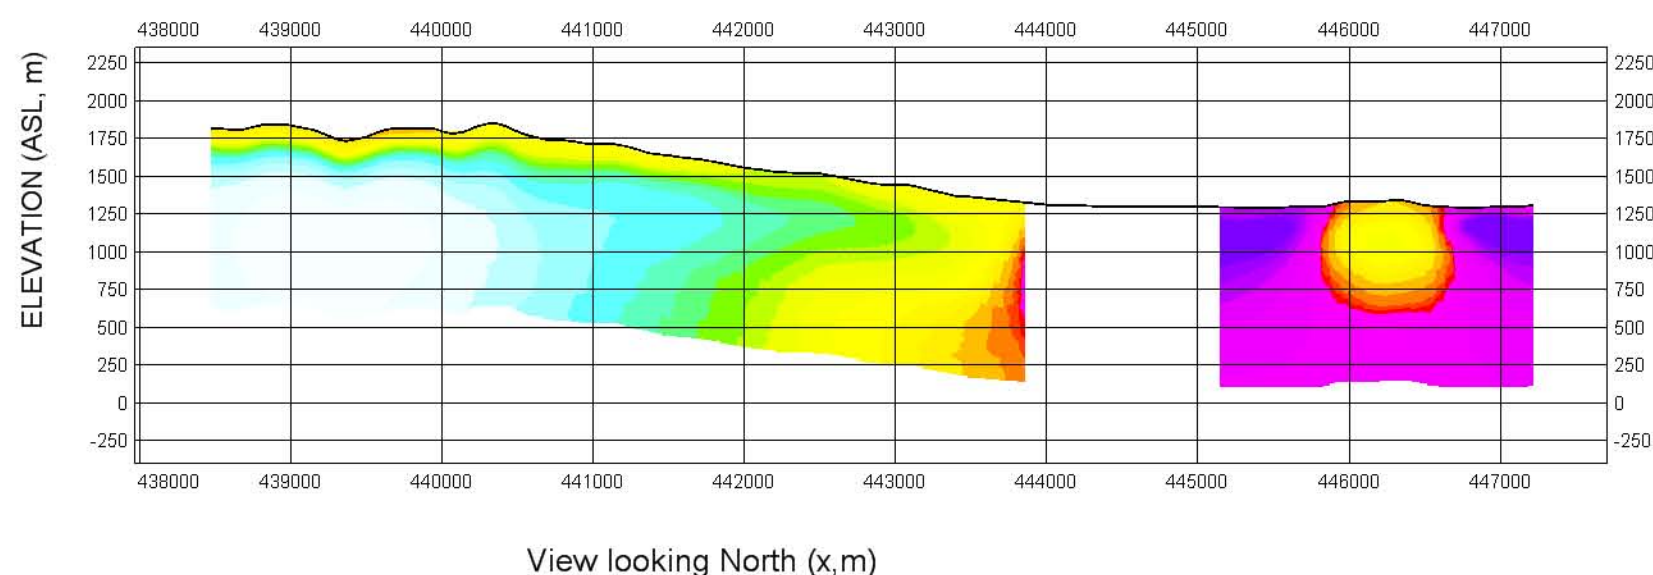

Sierra Geothermal Power Corp.
Silver Block
Tonopah, Nevada

Geotech ZTEM System
Resistivity-Depth Image
Line L2140
Flight 10 - Nov 14, 2009

Flown and processed by Geotech Ltd.
245 Industrial Parkway North.,
Aurora, Ontario, Canada L4G 4C4
www.geotech.ca

Feb 2010