






INVERSION PARAMETERS  
2D inversion code: Geotech Zvert2D-beta  
Model Mesh: 440 wide x 62 vertical,  
23.93m cell width,  
2 cells between sites  
Input Data: 6 frequencies (30-720Hz),  
In-Phase & Quadrature,  
Z/X In-line (only)  
Sampling: Data sampled to every 4 points  
(2304 total number of points)  
Input error: 1.5% to In-Phase & Quadrature  
(1.5-times error to 30Hz data)  
Output error: 84% RMS in 4 iterations  
Half-space resistivity: 300 ohm-m




Line 1040

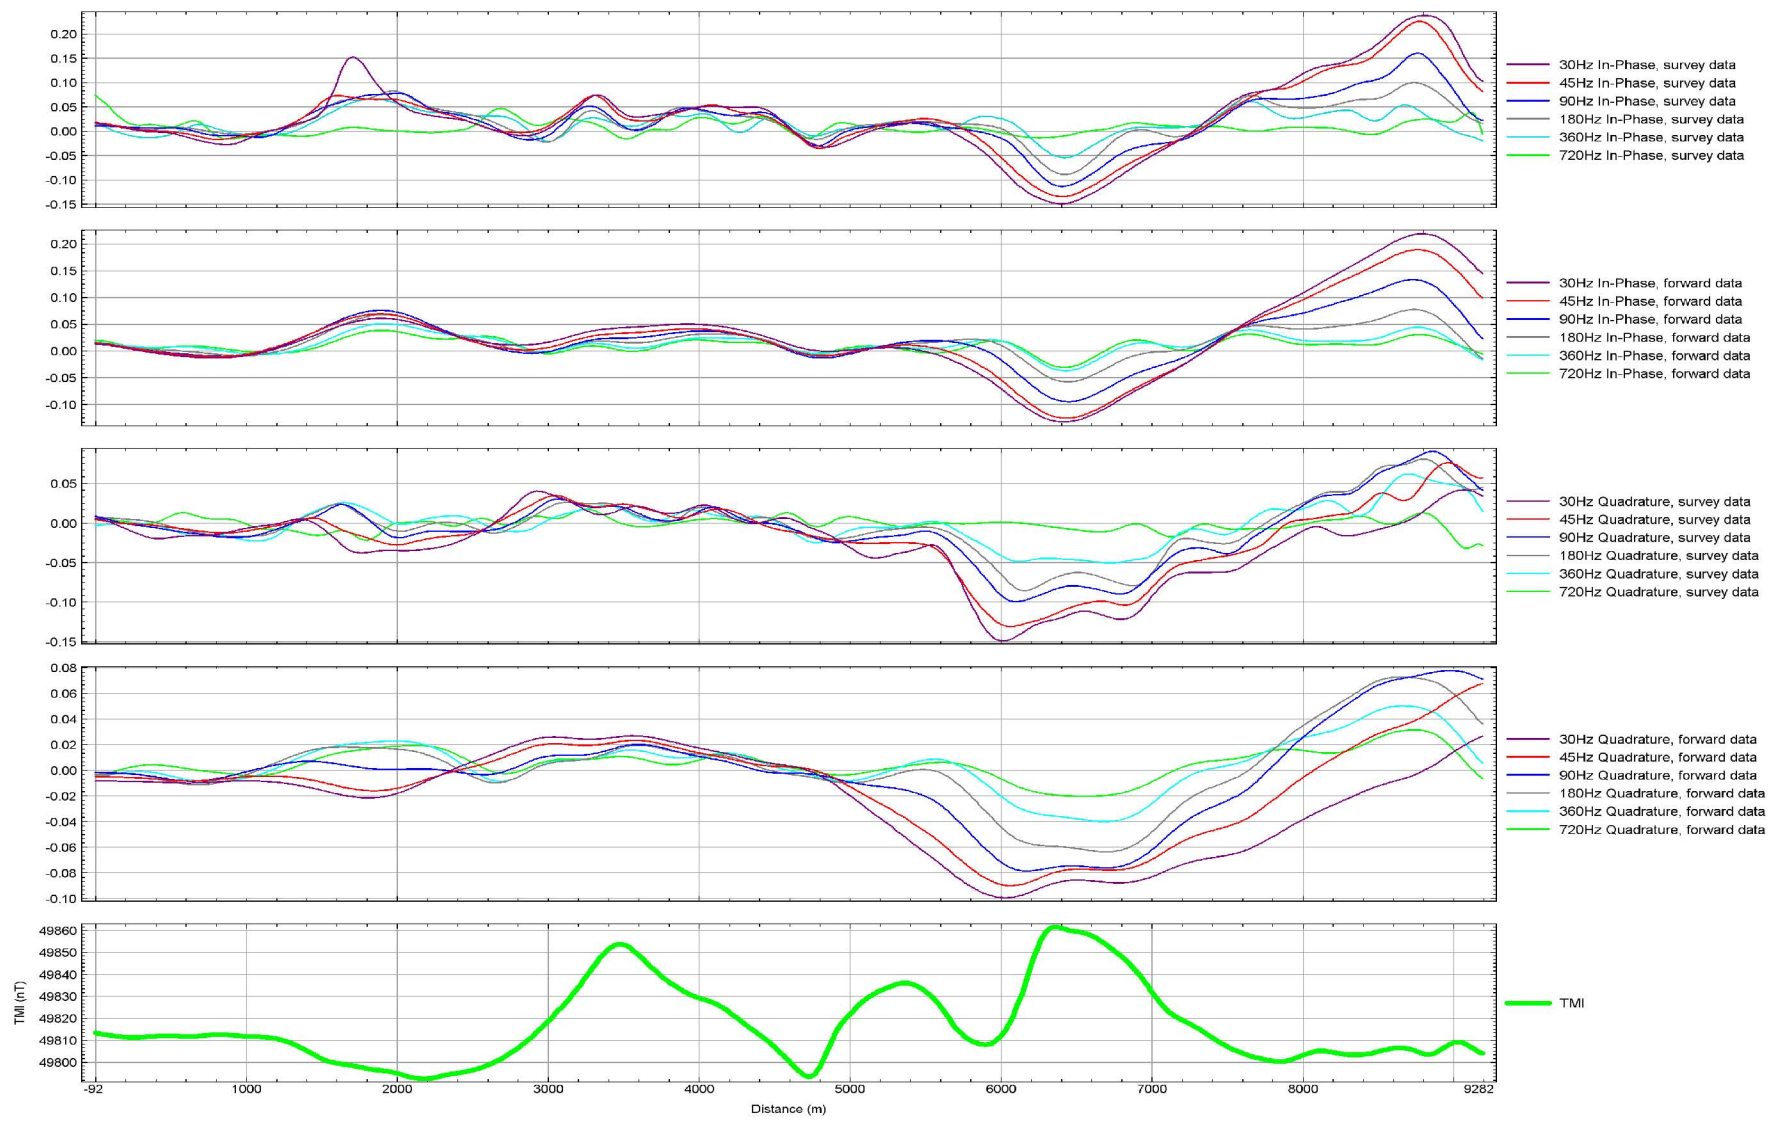

Resistivity  
[ohm-m]

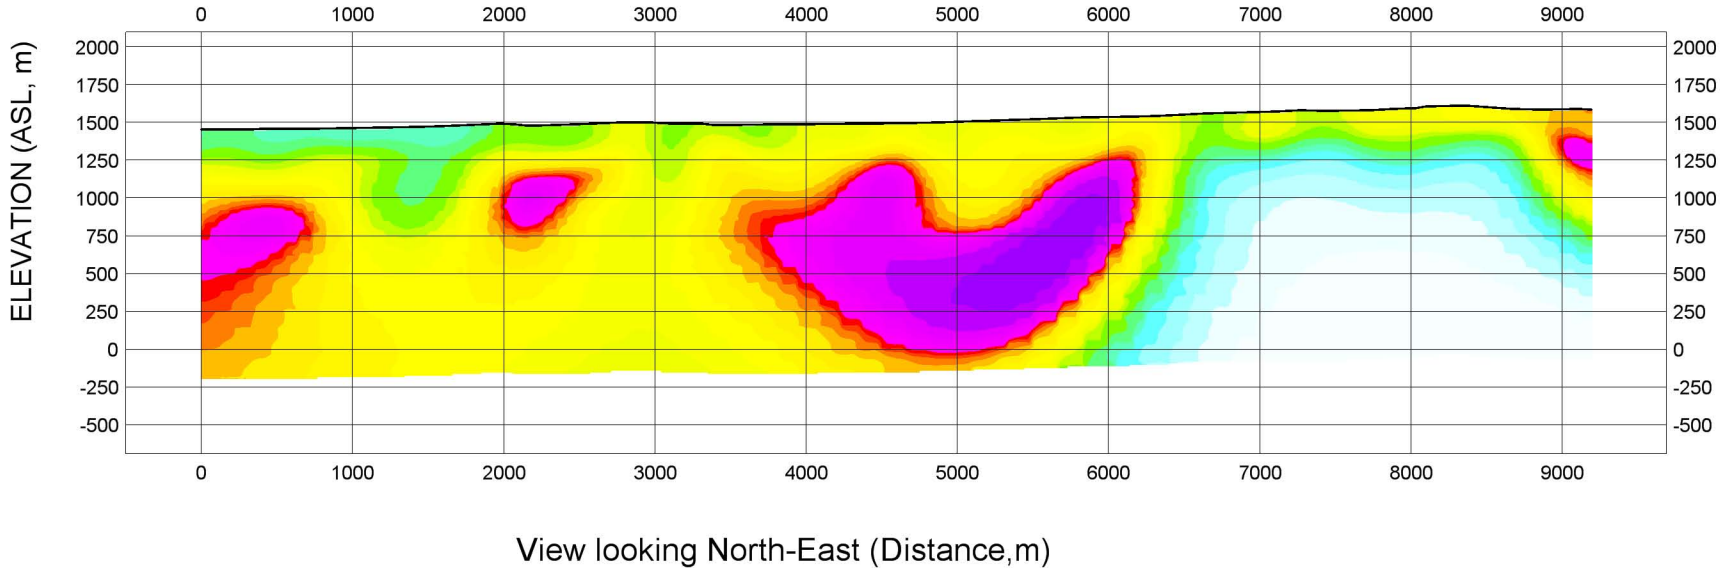

Flight Path of Line L1040  
over 90Hz In-Phase Total Divergence image

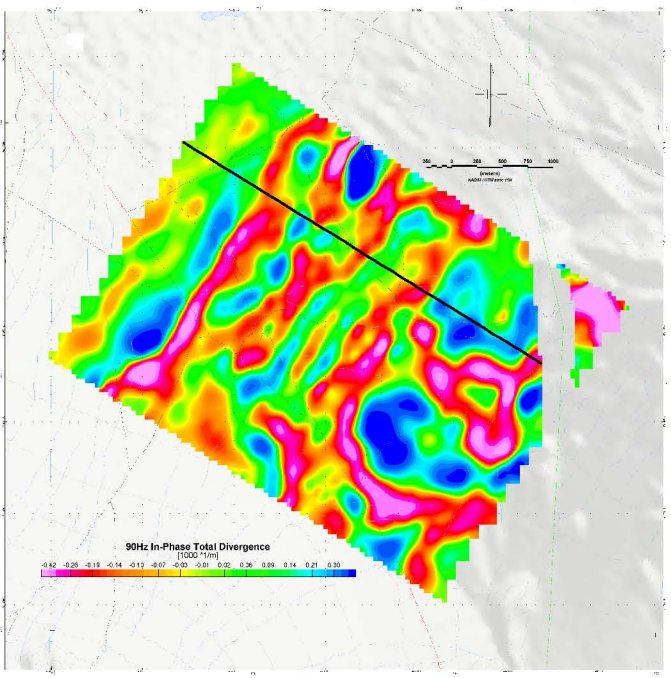

Sierra Geothermal Power Corp.  
Alum Block  
Tonopah, Nevada

Geotech ZTEM System  
Resistivity-Depth Image  
Line L1040  
Flight 8 - Nov 13, 2009

Flown and processed by Geotech Ltd.  
245 Industrial Parkway North.,  
Aurora, Ontario, Canada L4G 4C4  
www.geotech.ca

Jan 2010