

INVERSION PARAMETERS

2D inversion code: Geotech Zvert2D-beta

Model Mesh: 440 wide x 62 vertical,
26.34m cell width,
2 cells between sites


Input Data: 6 frequencies (30-720Hz),
In-Phase & Quadrature,
Z/X In-line (only)

Sampling: Data sampled to every 4 points
(2304 total number of points)





Input error: 1.3% to In-Phase & Quadrature
(1.3-times error to 30Hz data)

Output error: 96% RMS in 4 iterations


Half-space resistivity: 300 ohm-m



Line 1110

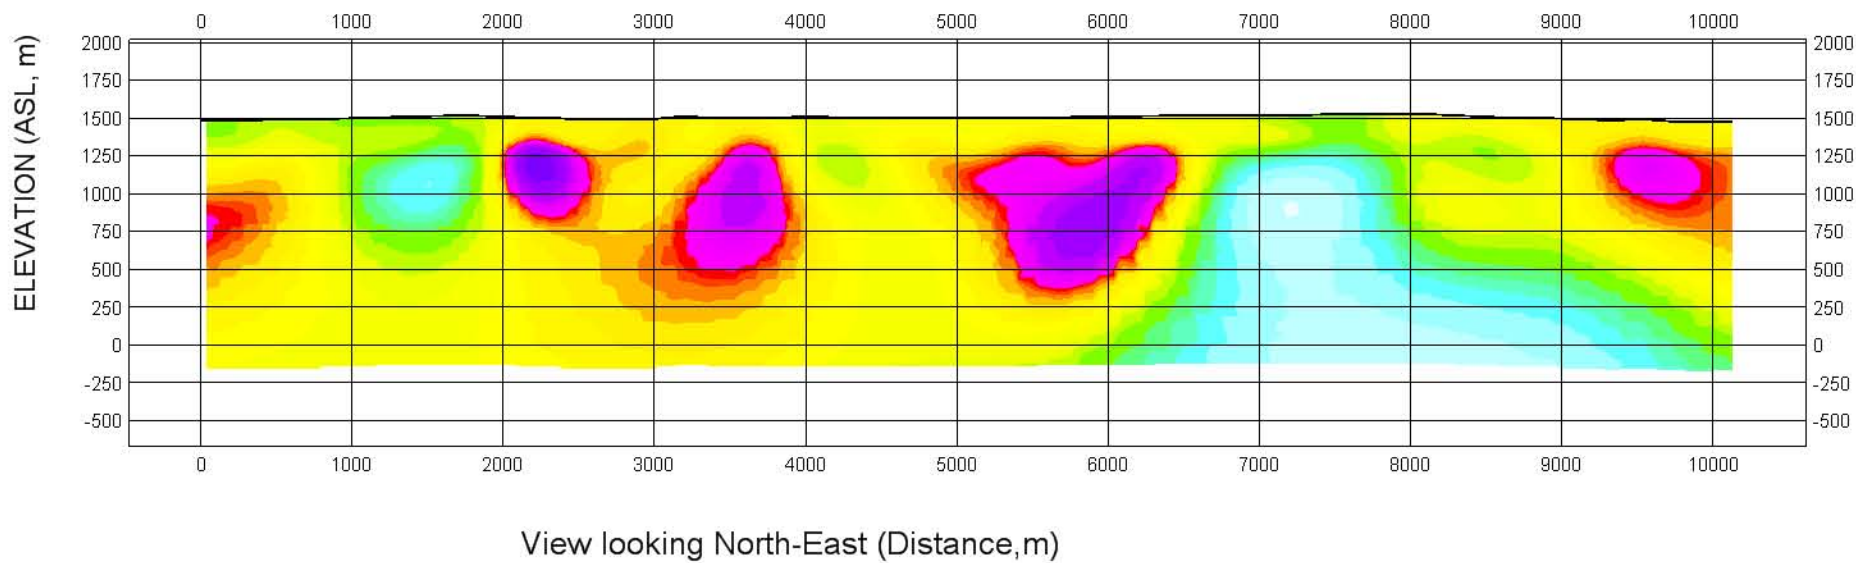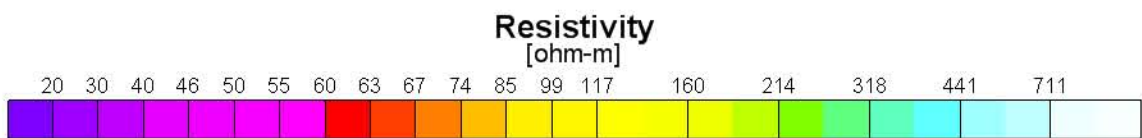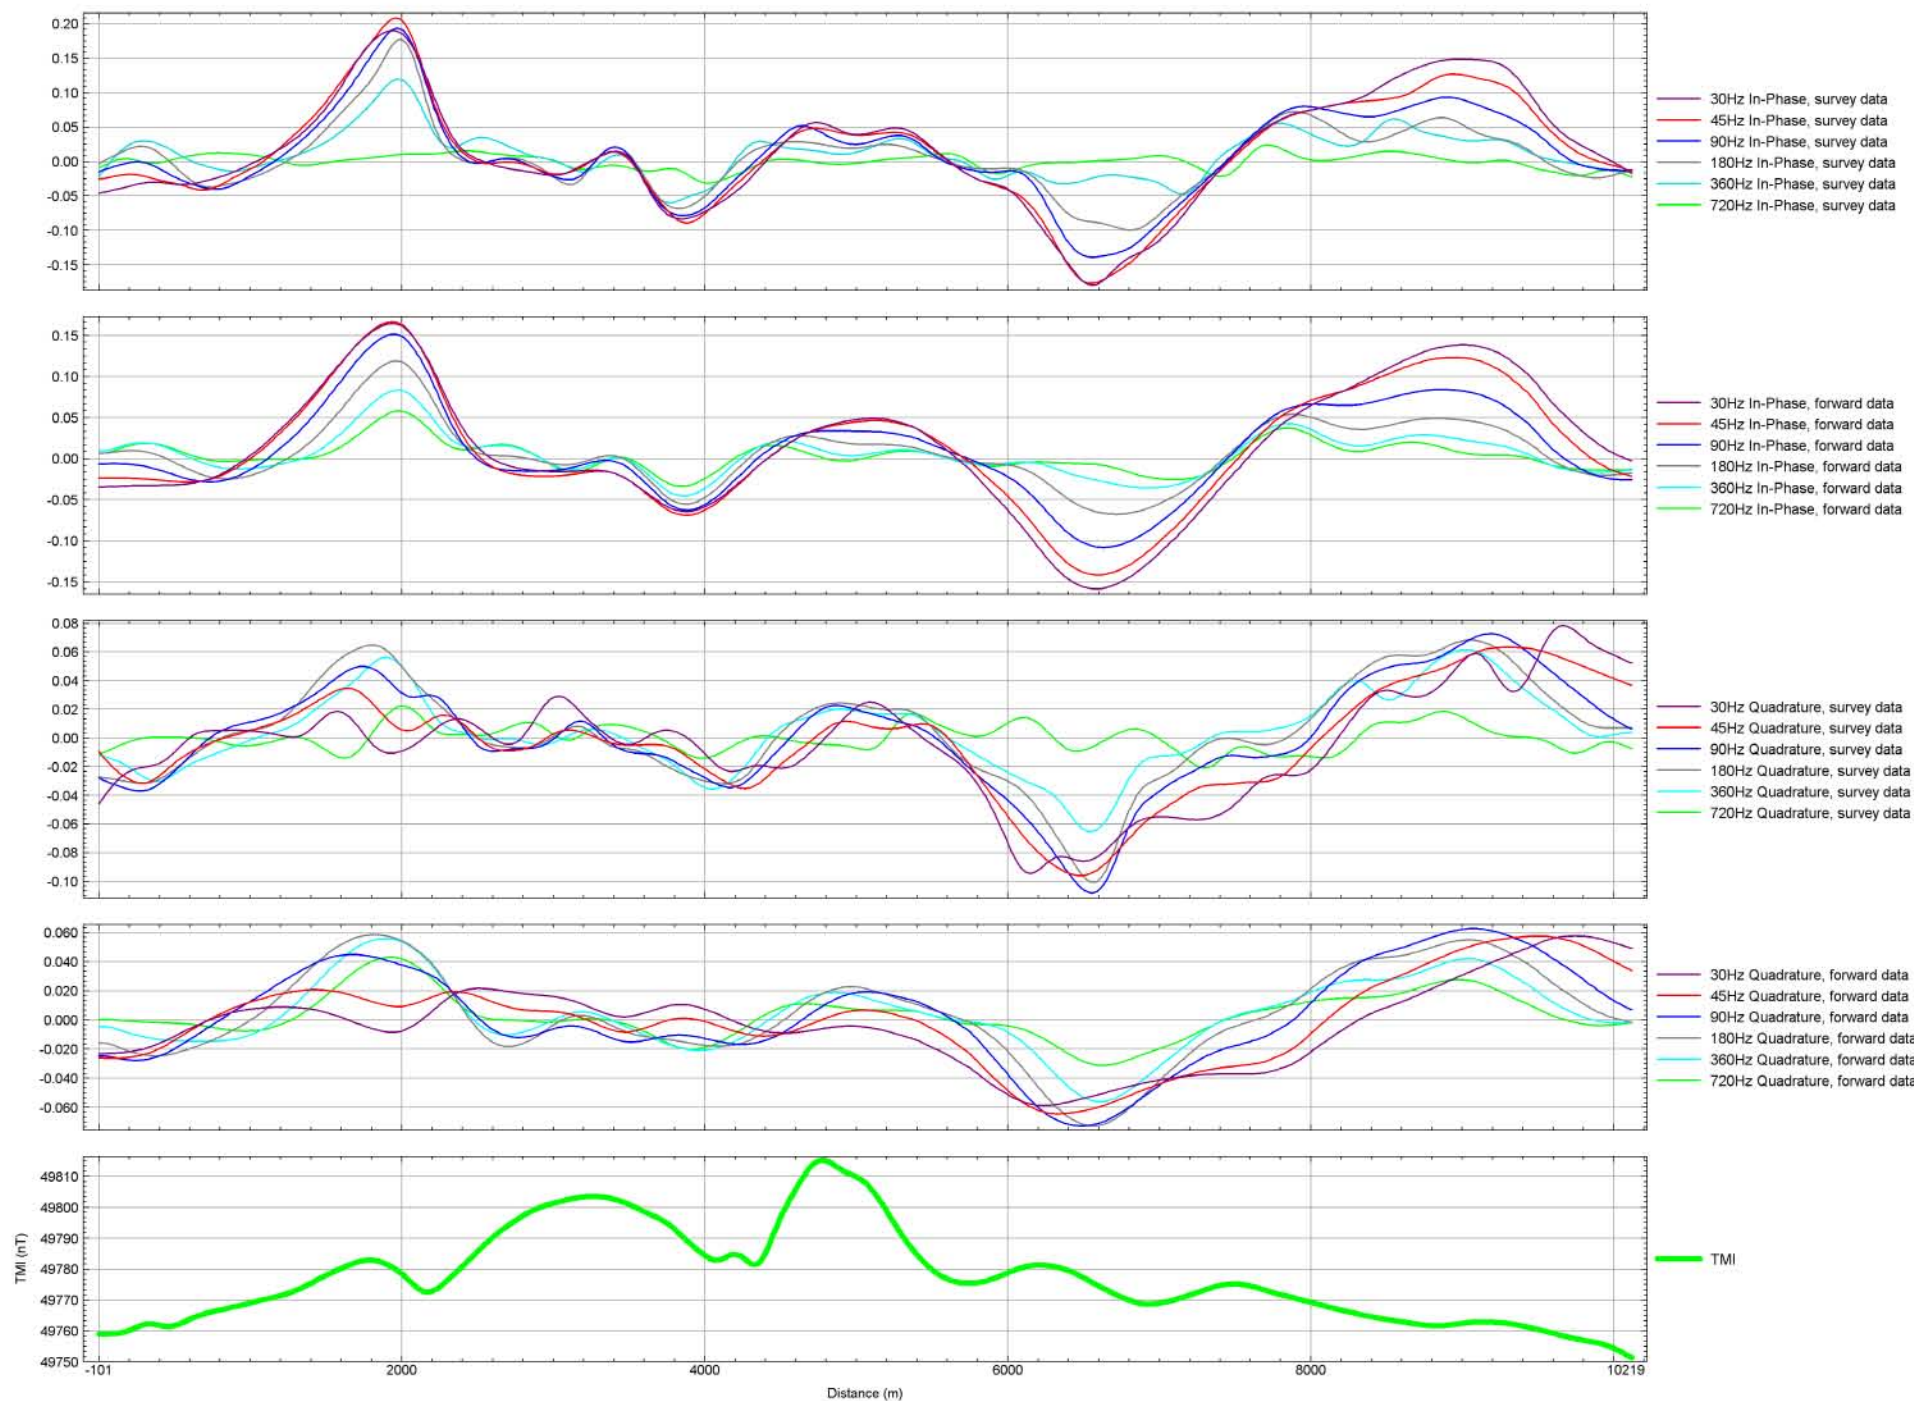

Flight Path of Line L1110
over 90Hz In-Phase Total Divergence image

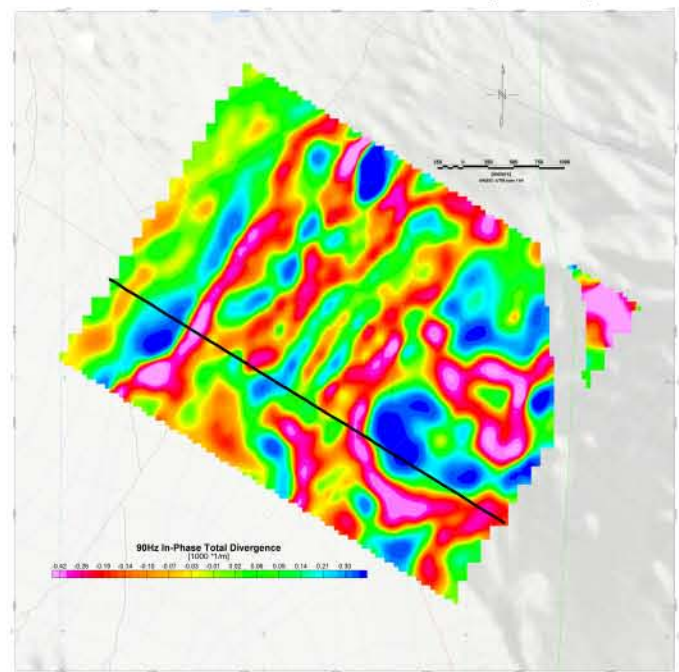

Sierra Geothermal Power Corp.
Alum Block
Tonopah, Nevada

Geotech ZTEM System
Resistivity-Depth Image
Line L1110
Flight 7 - Nov 13, 2009

Flown and processed by Geotech Ltd.
245 Industrial Parkway North.,
Aurora, Ontario, Canada L4G 4C4
www.geotech.ca

Jan 2010